

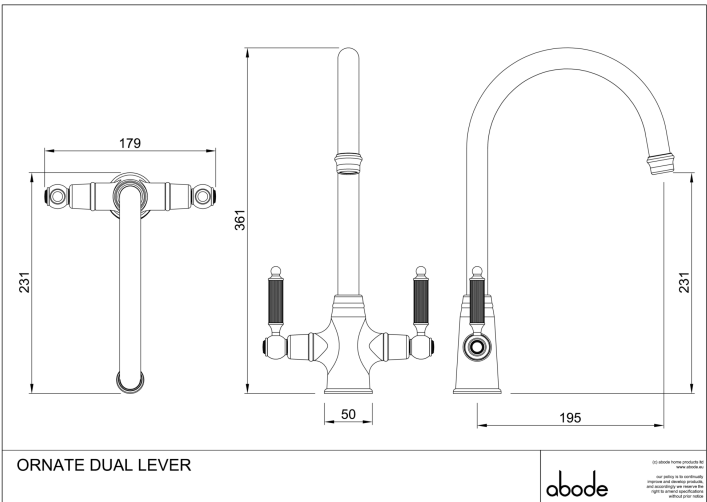
Ornate - Monobloc
Polished Nickel

abode

Product Basics:

	Product code	AT2252
	EAN 13 barcode	5060879996557
	Specification version	0 20/05/2025
	Finish	Polished Nickel
	Notes:	

Product drawing & dimensions:

	Overall Product Length (mm) <small>(typically left to right dimension of product)</small>	179
	Overall Product Width (mm) <small>(typically the rear of the base plinth to the end of the spout)</small>	230
	Overall Product Height (mm) <small>(typically from base of tap to top of spout)</small>	360
	Spout Exit Height (mm) <small>(typically from the base of the tap to the underside of the aerator)</small>	231
	Spout Exit Height (Maximum mm) <small>(typically from the base of the tap to the underside of the aerator, only applicable to taps with moving spouts)</small>	
	Spout Exit Reach (mm) <small>(typically from the centreline of the tap hole to the centre of the aerator)</small>	195
	Spout Exit Reach (At Maximum mm) <small>(typically from the centreline of the tap hole to the centre of the aerator, only applicable to taps with moving spouts)</small>	
	Base Diameter (mm) <small>(typically the diameter of the base plinth or the size of the wall plate)</small>	50
	Handle Back Projection (mm) <small>(typically the distance from the centre of the tap hole to the furthest point backwards of the lever when rotated)</small>	
	Tap Hole or Mounting Holes Size (mm) <small>(min. & max. mounting hole size)</small>	35mm diameter
	Tap Hole Centre Spacing (mm) <small>(recommended distance between tap holes)</small>	
	Fixing range (mm) <small>(min – max surface fixing depth)</small>	0 - 50
	Recommended Hole size <small>(wall mounted products only)</small>	

Packing summary:

- Packaging Type: Boxed
- Packaged size LxWxD: 440x340x70
- Gross weight (ea): 1.997Kg

Warranty summary:

Details of Warranty duration and Terms & Conditions for each product type can be found on our website:
abodedesigns.co.uk/support/warranty

Certain products may benefit by registering the Warranty here:
abodedesigns.co.uk/support/register/warranty

Care summary:

- Clean the mixers and showers regularly as required, using a mild soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt.
- After cleaning rinse thoroughly with clean water to remove any cleaner residue.
- Avoid contact with any harsh chemical or abrasives, for more detail see supplied booklet or www.abodedesigns.co.uk

Features:

Delivers filtered water?	Delivers filtered 98°C water?	Has a spray function?	Has a Pull around (semi pro) function?	Product is flow limited?	Product is DDA compliant?	Total number of exits (shower controls only)	Total number of independent exits (shower controls only)
X	X	X	X	X	Yes	X	X

Flow characteristics:

<p>Flow performance for model: Ornate Mono</p> <p>Q: flow rate (liters / Minute) *</p> <p>P: dynamic pressure (bar)</p> <p>note 1: note 2:</p> <p>abode</p> <p><small>© abode, not to be reproduced without prior permission *Flow rate data shown is correct at the time of testing, abode reserve the right to amend specification without prior notice</small></p>	Min. cold water pressure (bar)	0.3
	Min. hot water pressure (bar)	0.3
	Max. water pressure (bar)	5.5
	Max. flow at 3 bar (l/m)	17.17
	General notes on pressures / flow:	

Flow Limiter:

Max. Design Flow limit	Flow limiter (USG/LPM)	Flow limiter Type
n/a	n/a	n/a

Spout:

Flow characteristics	Spout Rotation Range (°)	Spout End Connection (spout end threading)
dual flow	360	m22 male

Connections:

Function	Type	Inlet connection	Outlet connection	Overall Length	Check valve included?	Other information
Hot Water Inlet	Flexible Stainless Braided Hose	1/2" BSP Female	M12	250		
Cold Water Inlet	Flexible Stainless Braided Hose	1/2" BSP Female	M12	250		

Filtration:

Filter Type	Filter media	Filter reorder code