

Product Finish: Brushed Nickel

Product code: AT2185
EAN13 barcode: 5060879990418



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


Product features:

- Metal construction throughout
- Single lever control for effortless single handed control
- Urban industrial styling
- Supplied complete with flexible tail pipes for fast simple fitting
- Antisplash spout supplied as standard

Additional information / Parts included:

2.5mm a/f Allen key included

Product dimensions:

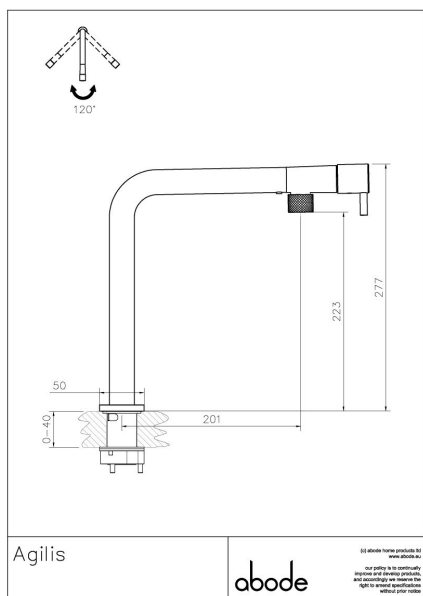

- **Overall Height / projection:** 277 mm
- **Exit reach:** 201 mm
- **Exit height:** 223 mm
- **Centre distance(s):**


- **Base diameter(s):** 50 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 40 mm

- **Spout diameter:** 28 mm
- **Spout aerator size:** M22 male

Packaged properties:

- | | |
|--------------------------------|-----------------------------|
| Box length: 435mm | Box depth: 70mm |
| Box width: 340mm | Units per outer: 5 |
| Tap only weight: 1.31kg | Boxed weight: 2.10kg |

Product flow characteristics:

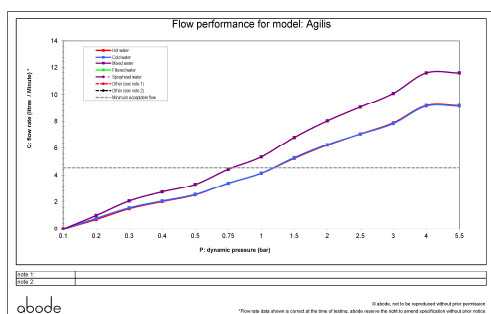

- **Min / Max water pressure:** 0.75 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 10.09

- **Control valve type:** Single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Integral to hot & cold inlets

- **Aerator type:** Honeycomb Aerator
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Not applicable

- **Tail pipe inlet / outlet size:** M8 / 3/8" Female non captive (c/w 3/8" m x 1/2"F adaptors)

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year