

Product Finish: Matt Black

Product code: AT2105
EAN13 barcode: 5060344157650



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


Product features:

- Metal construction throughout
- Supplied complete with flexible tail pipes for fast simple fitting
- Minimalist planate design form
- Quarter turn handle action for precise flow control
- Antisplash spout supplied as standard

Additional information / Parts included:

Includes triangular stabilising bracket, 2.0 & 2.5mm A/F Allen key & high flow aerator

Product dimensions:

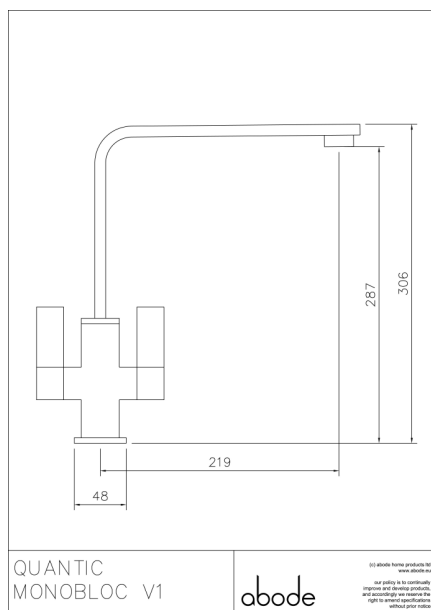

- **Overall Height / projection:** 306 mm
- **Exit reach:** 219 mm
- **Exit height:** 287 mm
- **Centre distance(s):**


- **Base diameter(s):** 48 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 45 mm

- **Spout diameter:** 30 x 10 mm
- **Spout aerator size:** M24

Packaged properties:

- Box length:** 445mm
- Box depth:** 70mm
- Box width:** 335mm
- Units per outer:** 5
- Tap only weight:** 1.30kg
- Boxed weight:** 1.74kg

Product flow characteristics:

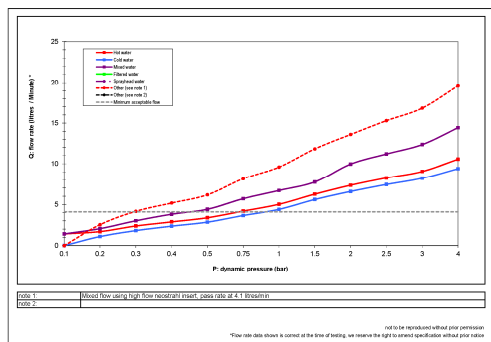

- **Min / Max water pressure:** 0.30 / 5.50 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 12.36

- **Control valve type:** M20 ceramic disc, quarter turn operation
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Cold only

- **Aerator type:** Honeycomb aerator & hi-flow neostrahl
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Grub screw

- **Tail pipe inlet / outlet size:** M10 / 1/2" Male (Hot), 1/2" Female (Cold)
- **Inlet pipe type / length:** flexible stainless braided hose / 365/370 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year