
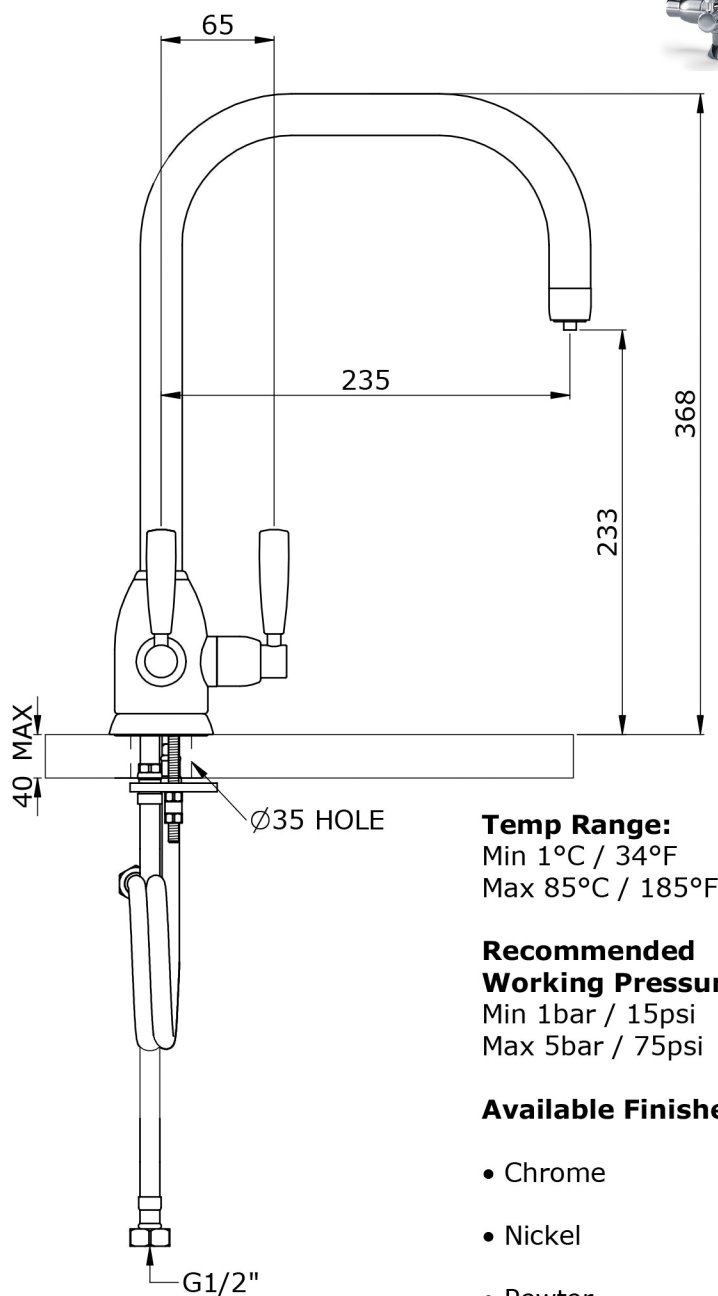


Specification: TF-KT32U- WHITEHALL

- 1/4 turn ceramic disc flow control
- Triflow Stainless Steel push fit filter housing
- Flexible connections
- Swivel spout

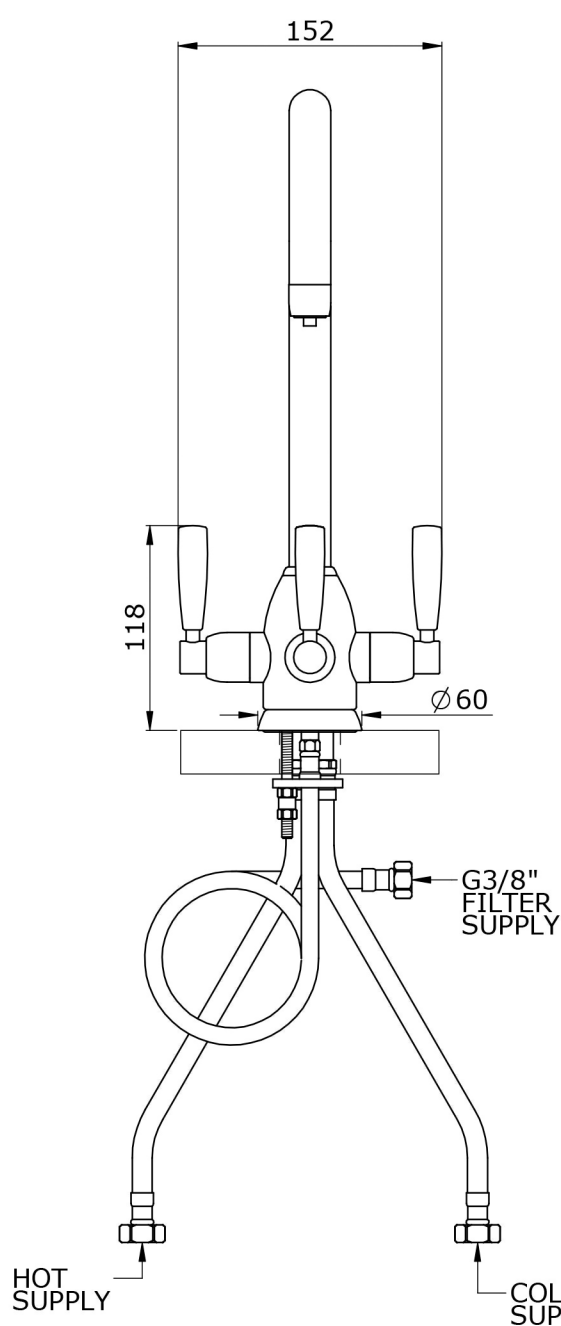

Temp Range:

Min 1°C / 34°F

Max 85°C / 185°F

Recommended

Working Pressure:

Min 1bar / 15psi

Max 5bar / 75psi

Available Finishes:

- Chrome
- Nickel
- Pewter

Triflow Concepts Limited.

T +44(0)800 999 3959

E support@triflowconcepts.com

W www.triflowconcepts.com

TRIFLOW CONCEPTS LTD ©

Triflow, the Triflow Logo, Triflow Quadro and FRXo2 are registered trademarks of Triflow (IP) Limited
Triflow Quadro Logo, Triflow 160, 320, 321 & Triflow 500™