



Zip


Accessibility Controller

For G4 & G5 HydroTap

Model number:

Boiling Chilled 95671Z00 (chrome), 95671Z03 (matt black)

Boiling, Chilled, Sparkling 95670Z00 (chrome), 95670Z03 (matt black)

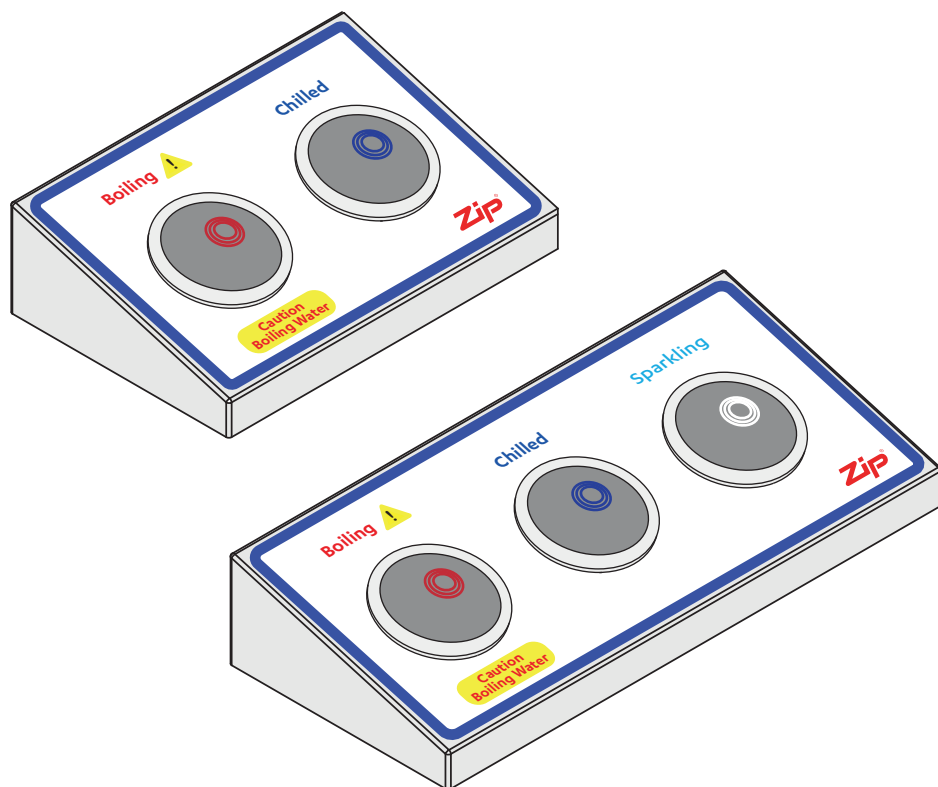

Chrome case / white label illustrations shown, install all models in the same way.

SAFETY INFORMATION

Explanation of symbols



Read the
instructions



WARNING



DANGER
Electric shock



HOT
surfaces

SAFETY WARNINGS

- The Command Centre contains very hot water and dangerous voltages, isolate the mains electrical power where stated below.
- Do not remove the Command Centre cover.
- It is essential to read and understand these instructions for a safe installation.
- Only install on horizontal worktop to avoid accidental dispense.
- Use of tools can be hazardous, assess the risks before you start.
- G4 Classic tap levers must not be pulled forward in timed dispense mode otherwise the Accessibility Controller will not function.


Supplied parts

Qty		Description
95671xxx	95670xxx	
1		Case (top and bottom).
2		Label (choose either according to user preference).
1		Control box assembly.
2	3	Sensor buttons, fixing and bezel rings.
2		Case fixing screws.
1 x fixing kit		4x Adhesive base cable ties, 4x M6 washer & 4x M6 wing nuts.

1. Configure the Command Centre

Ensure that 'Legacy Tap' is NOT selected.

- Go to the LCD on the Command Centre.
- Select [Menu].
- Follow the paths adjacent dependent on model.

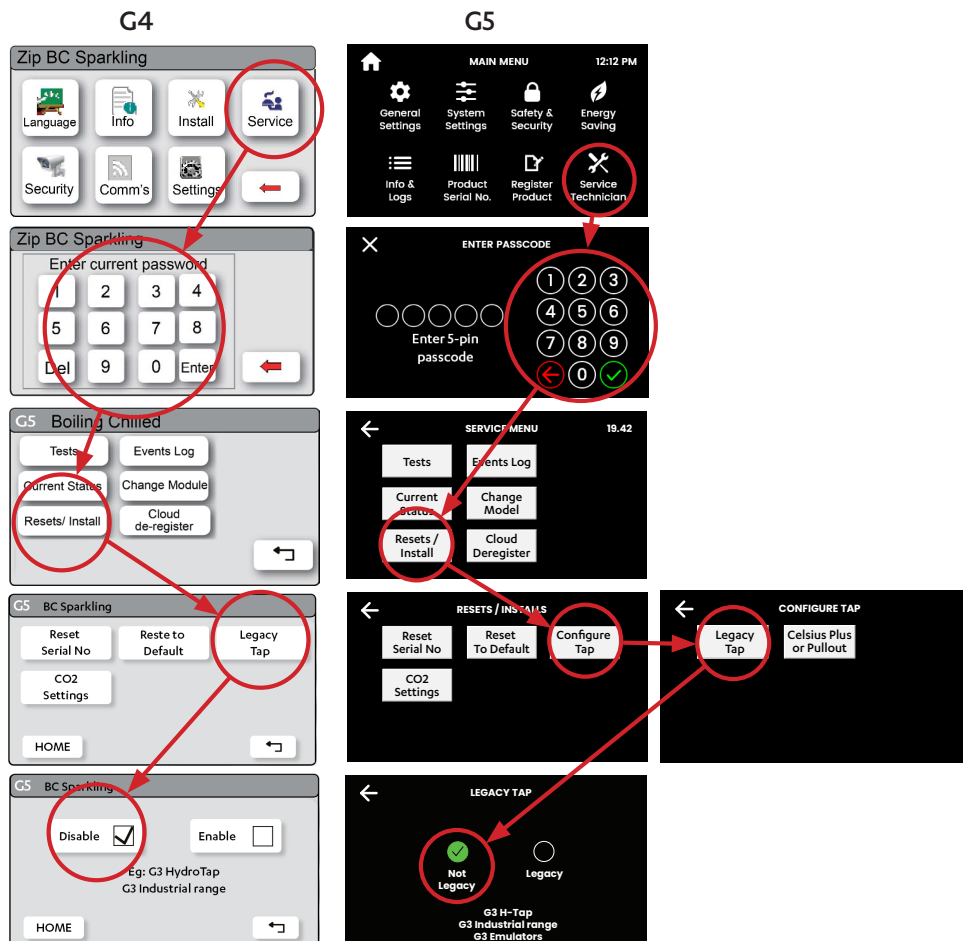


2. Configure the safety lock



The safety lock works in tandem on both tap and controller.



The user can choose whether to enable or disable it.

- Go to the LCD on the Command Centre.
- Select [Menu].
- Follow the paths adjacent dependent on model.
- Select preferred options.

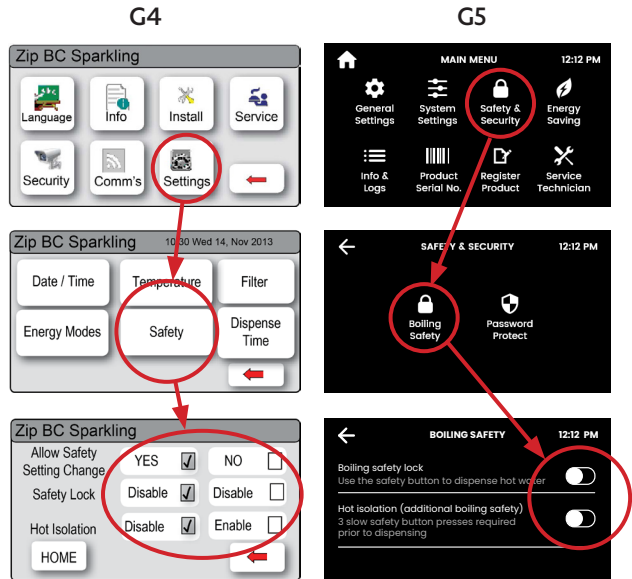

3. Cut the holes for the case bottom

- Turn off mains power to the Command Centre.
- Offer up the case bottom to the place on a worktop where it's going to be fitted, mark the hole positions, Ø7mm for studs, Ø23mm for feed-throughs.
- Cut holes for the worktop studs **1** and cable feed-throughs. **2**
- Secure the case bottom to the worktop with the nuts and washers supplied.

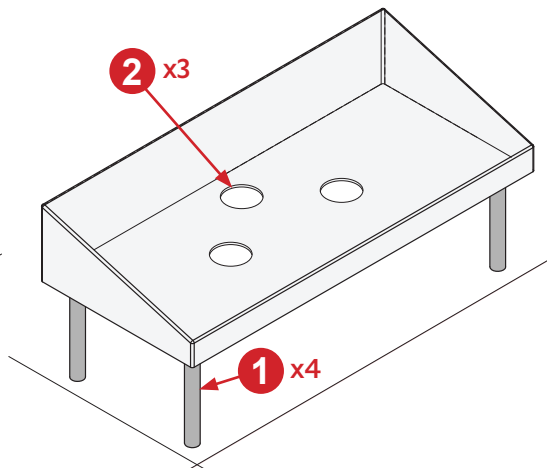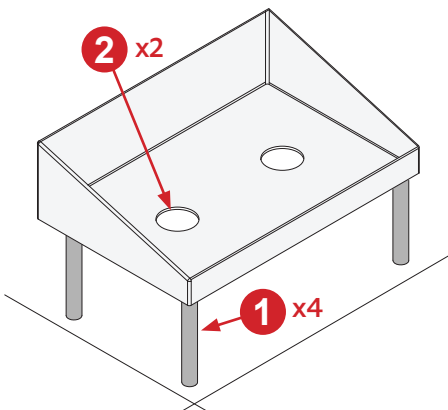


4. Fit the control box


- Attach control box to cupboard wall using appropriate fixings.

Male connector - USB
Command Centre cable

Female connector
- USB Tap cable

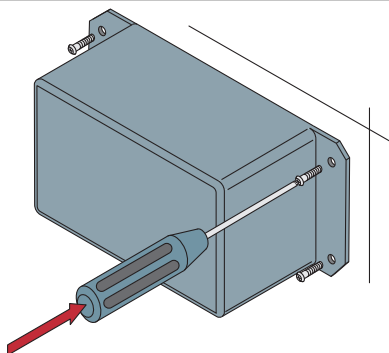

- Disconnect the tap/Command Centre USB cables.
- Connect the free ends to the control box.

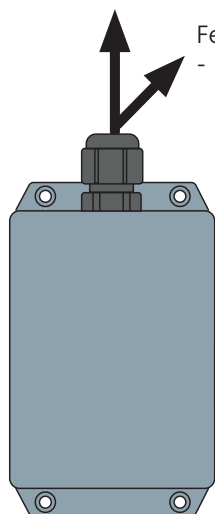



(Blue Marking) Chilled sensor

(White Marking) Sparkling sensor

(Red Marking) Boiling sensor

5. Fit the label

- There is a choice of 2 contrasting colour labels. (white label show in illustrations).
- Fit either label depending upon user preference.

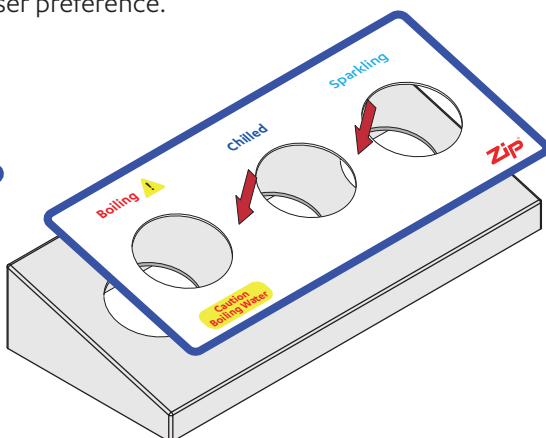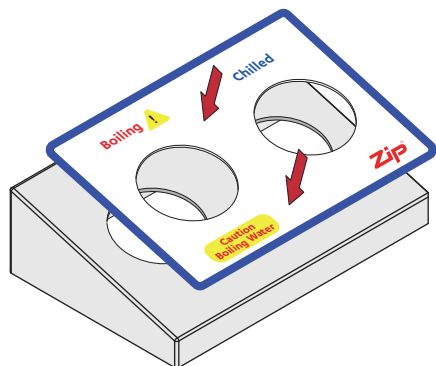


6. Fit the button sensors

White marking Sparkling sensor.

Blue Marking Chilled sensor.

Red Marking Boiling sensor.

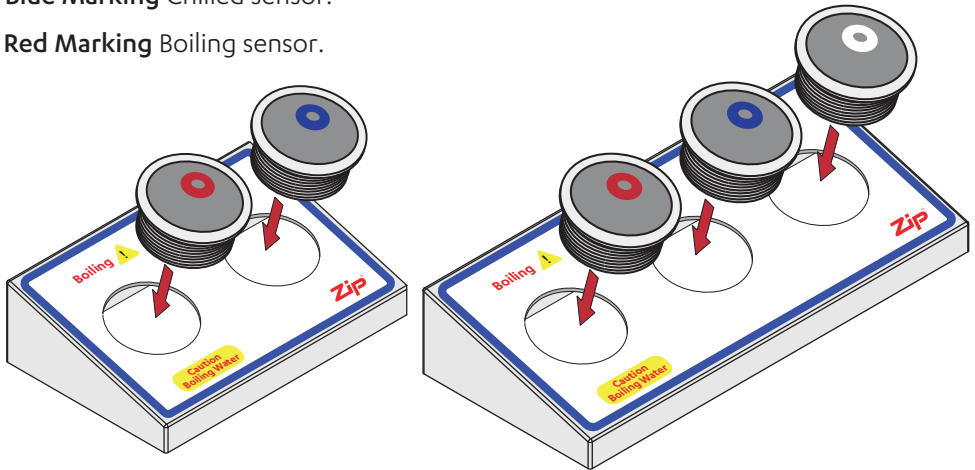


7. Secure the button sensors and attach the cables

- Turn the top-case over, and secure the button sensors in place with the brass fixing rings supplied.
- Feed the sensor cables (from the control box) through the hole in the worktop (and bottom case), and connect to the button sensors.

White marking Sparkling sensor.


Blue Marking Chilled sensor.

Red Marking Boiling sensor.

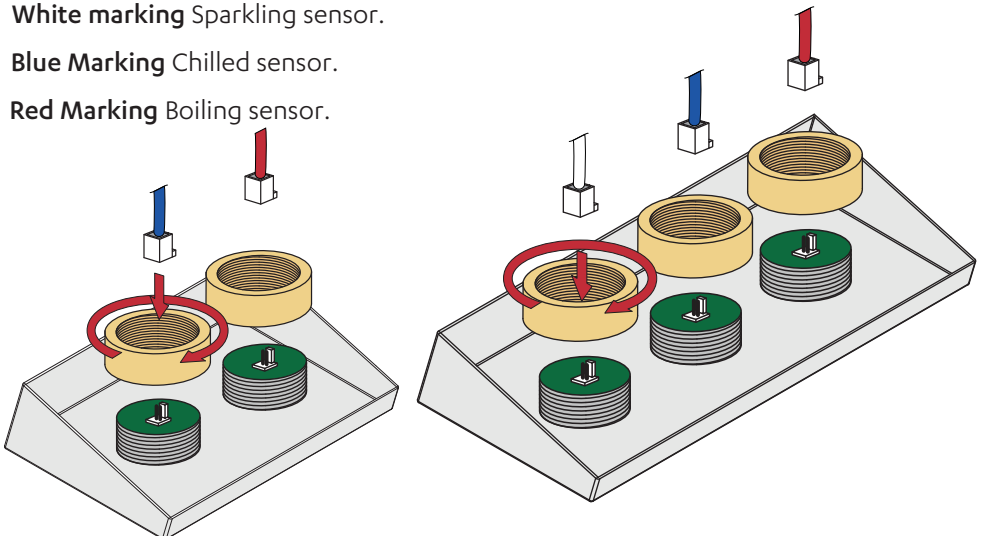

8. Fit the top-case assembly

- Fit the top-case over the bottom-case.
- Secure in place with fixing screws supplied.

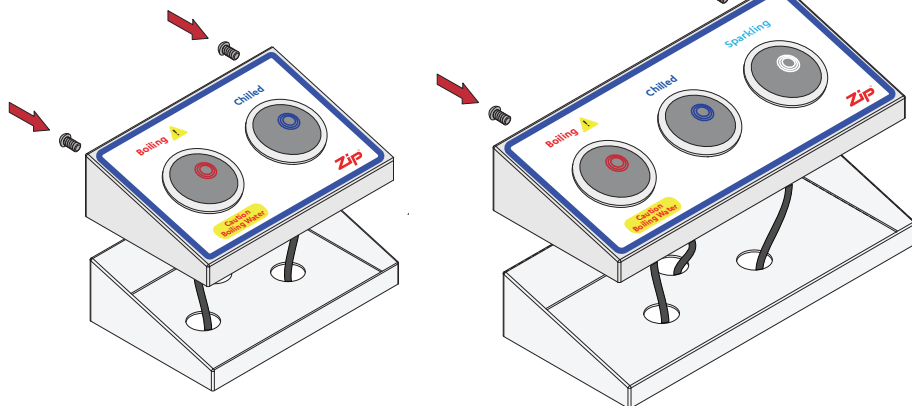

9. Commissioning & operation




If the G4 Classic tap levers are pulled forward in timed dispense mode, the Accessibility Controller will not function.

- Check that the control box & control panel are firmly secured in place.
- Check that the cables are tidily arranged and safely secured in order that they do not present a hazard inside the cupboard space.
- Restore mains power to the Command Centre.

To dispense Chilled or Sparkling water Press the relevant button.

To dispense Boiling water with safety lock OFF press the Boiling button.

To dispense Boiling water with safety lock ON press the Boiling button until it flashes, then press again to dispense.

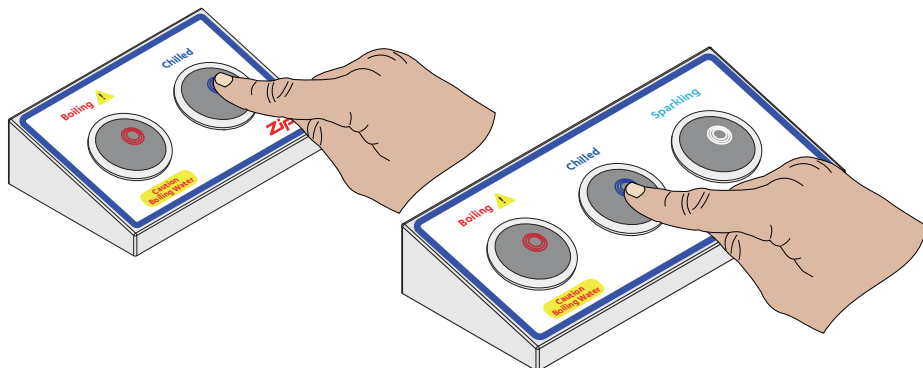



Zip Water UK

Trafalgar House, Rash's Green, Dereham, Norfolk, NR19 1JG
0345 6 005 005, sales@zipwater.co.uk

www.zipwater.co.uk